

Size: 2"-12"

Design Std: DIN3352

Face to Face: DIN3202-F4

Flange Drilling: DIN2532, DIN2533

Other flange drilling special, is available on customers' request.

The valve is closed by turning the stem in clockwise direction. Underground installation set available on request. Gear Box Operator or Wrench Head is available on customers' Requirement.

Non-Rising Stem, Inside Bonnet, Solid Wedge Disc, Flange Type

Application Specification



Size (DN)	Pressure Rating (PN)	Hydro-Test Prssure		Suitable Medium
		Body	Seat	
40-200	16	2.4 Mpa	1.6 MPa	Water, Oil, Steam
40-300	10	1.5 MPa	1.0 MPa	

Materials List

No	Part Name	Materials	
1	Body	ASTM A126A(B)	GG20 GG25
2	Wedge	ASTM A126A(B)+NBR	GG20 GG25+NBR
3	Wedge Nut	ASTM B36	Brass
4	Bonnet Gasket	Graphite	Graphite
5	Bonnet	ASTM A126A(B)	GG20 GG25
6	Bolt	A216 WCB	GS-C25
7	Nut	ASTM B36	Brass
8	Half Ring	A216 WCB	GS-C25
9	Packing	Graphite	Graphite
10	Gland	ASTM B36	Brass
11	Dustproof Ring	EPDM	EPDM
12	Stem	SS410	X10Cr13
13	Handwheel	ASTM A126A(B)	GG20 GG25
14	Washer	A216 WCB	GS-C25
15	Bolt	A216 WCB	GS-C25

Dimensions List (Flange conform to DIN2532)

DN	D	D1	D2	L	H	b	n	d
50	165	125	102	150	240	17	4	18
65	185	145	122	170	255	17	4	18
80	200	160	138	180	280	19	4	18
100	220	180	158	190	332	19	8	18
125	250	210	188	200	380	21	8	18
150	285	240	212	210	430	21	8	23
200	340	295	268	230	560	23	8	23
250	395	350	320	250	650	25	12	23
300	445	400	370	270	730	25	12	23

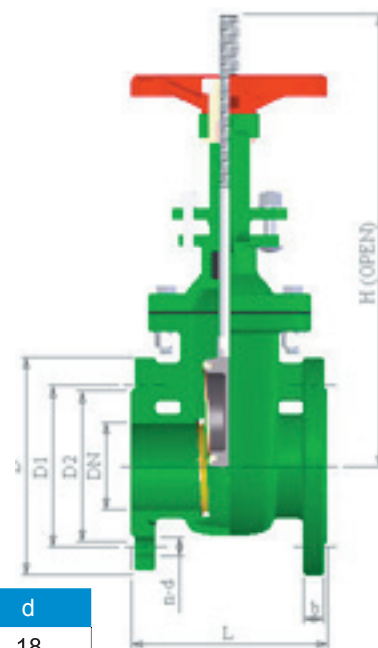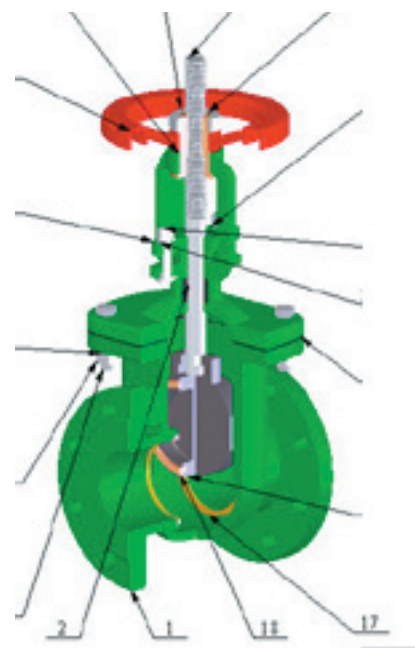

When placing the order, please specify Working Pressure, Working Temperature, Flange Drilling Etc;