
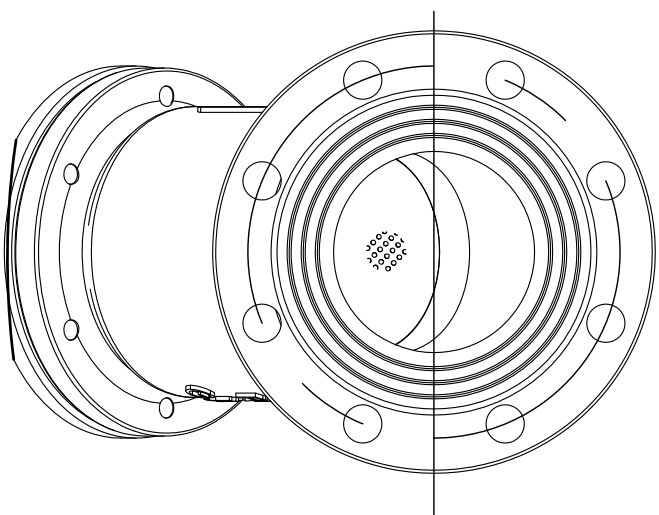


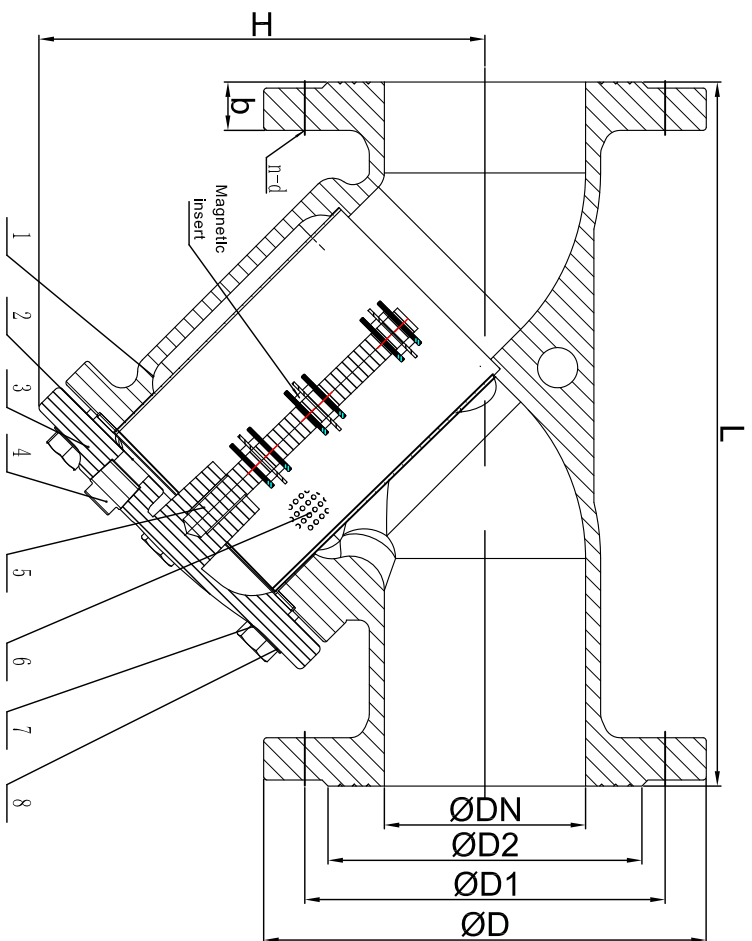

- 1.Face to face according to DIN 3202-F1.
- 2.Flange drilling according to EN1092-2 PN16.

DN	L	D	D1	D2	b	n-d	H
DN100	350	220	180	156	24	8-19	240
DN125	400	250	210	184	26	8-19	290
DN150	480	285	240	211	26	8-23	330
DN200	600	340	295	268	30	12-23	380
DN250	730	405	355	319	32	12-28	480
DN300	850	460	410	370	32	12-28	540

8	Washer	Galvanized steel	-	-
7	Bolt	Galvanized steel	-	-
6	Screen	Stainless steel	ASTM A276	304
5	Magnetic insert	-	-	-
4	Plug	Galvanized steel	-	-
3	Bonnet	Cast iron	ASTM A126	CLASS B
2	Gasket	Rubber	EN681.1	EPDM
1	Body	Cast iron	ASTM A126	CLASS B
No	Name	Material	Standard	Grade

DN	WANG	WEIGHT	MATERIAL
CHK		SCALE	Y-Strainer
APP		DATE	S101FM

Hiwa

REV 20190628