


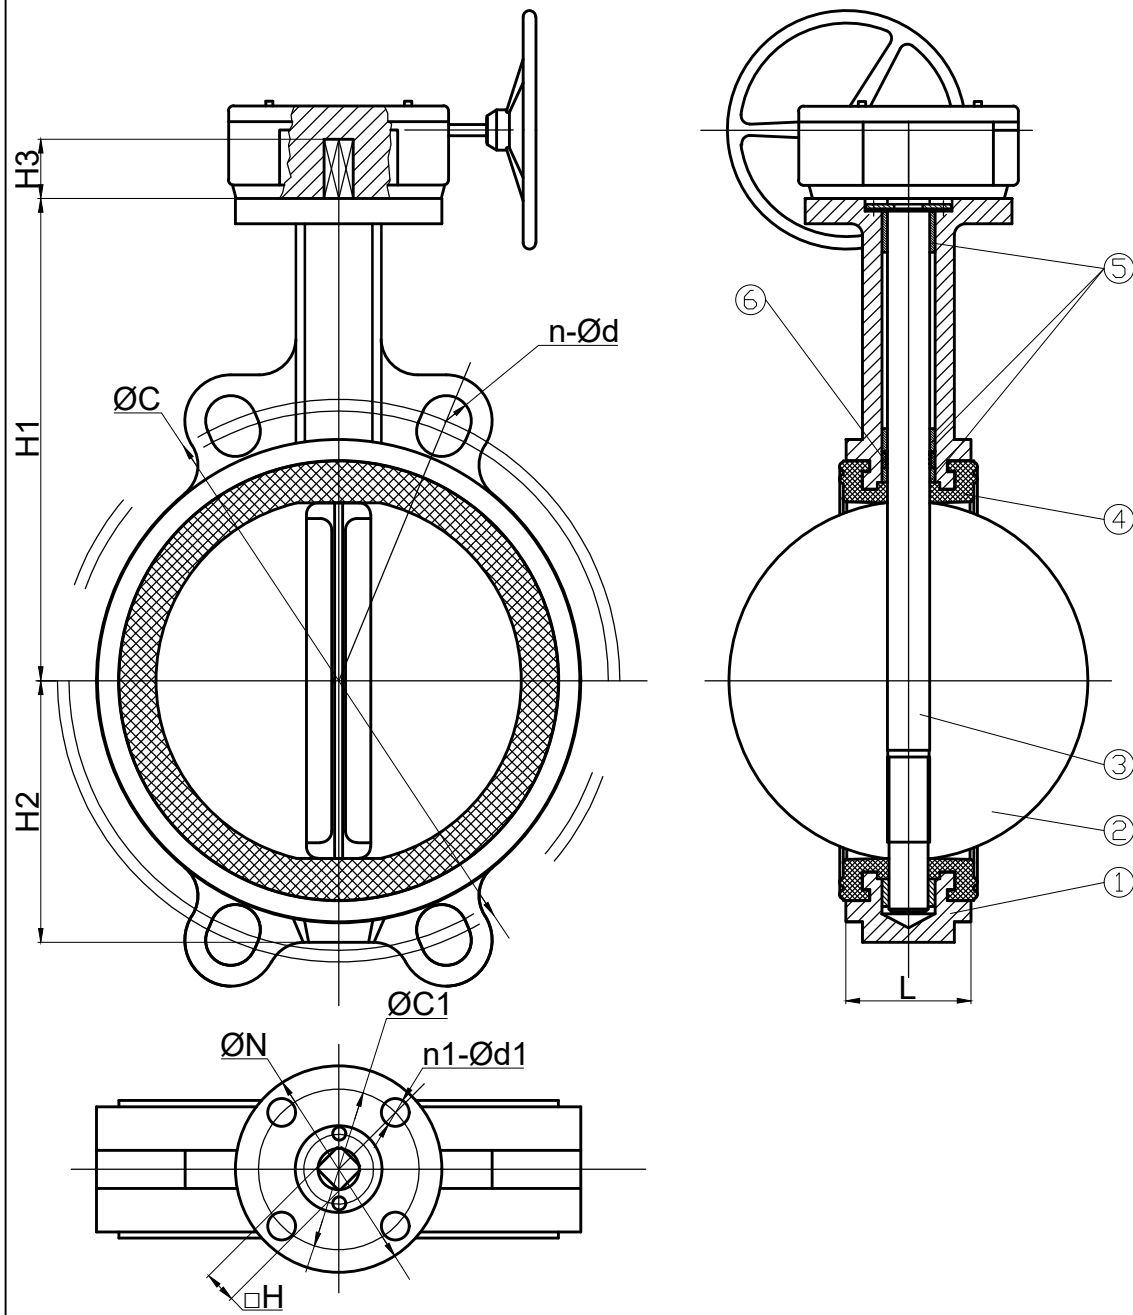

DN	L	DIN2501 PN10		DIN2501 PN16		H1	H2	H3	Flange No	ΦN	ΦC1	n1-Φd1	H
		ΦC	n-Φd	ΦC	n-Φd								
250	68	350	12-22	355	12-26	286	178	35	F10	125	102	4-Φ12	22
300	78	400	12-22	410	12-26	309	204	35	F10	125	102	4-Φ12	22

Nominal pressure		PN16
Test	Strength test	2.4Mpa
pressure	Sealing test	1.76Mpa
Maximum working temperture		-10℃ to +90℃
Suitable Media		W.O.G etc

- 1.Design and manufacture according to ISO5752.
- 2.Face to face according to EN558-1 20 Series.
- 3.Flange drilling according to DIN2501 PN10/16.
- 4.Top flange drilling according to ISO 5211.
- 5.Pressure test according to API598.

6	Seal Ring	EPDM		
5	Bushing	PTFE		
4	Seat	EPDM		
3	Stem	SS420		
2	Disc	SS316		
1	Body	GGG40		
Item	Part name	Material	Q'ty	Remark

DRN	wang	WEIGHT		MATERIAL	
CHK		SCALE		Butterfly Valve	
APP		DATE	03/05/2025		
				B23W-HJ	
				REV	250305A