
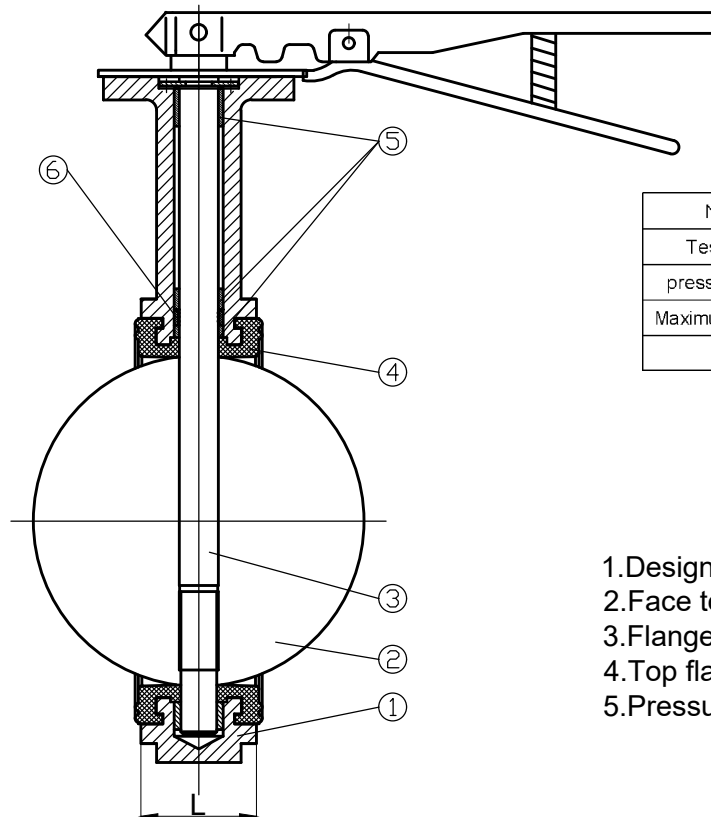


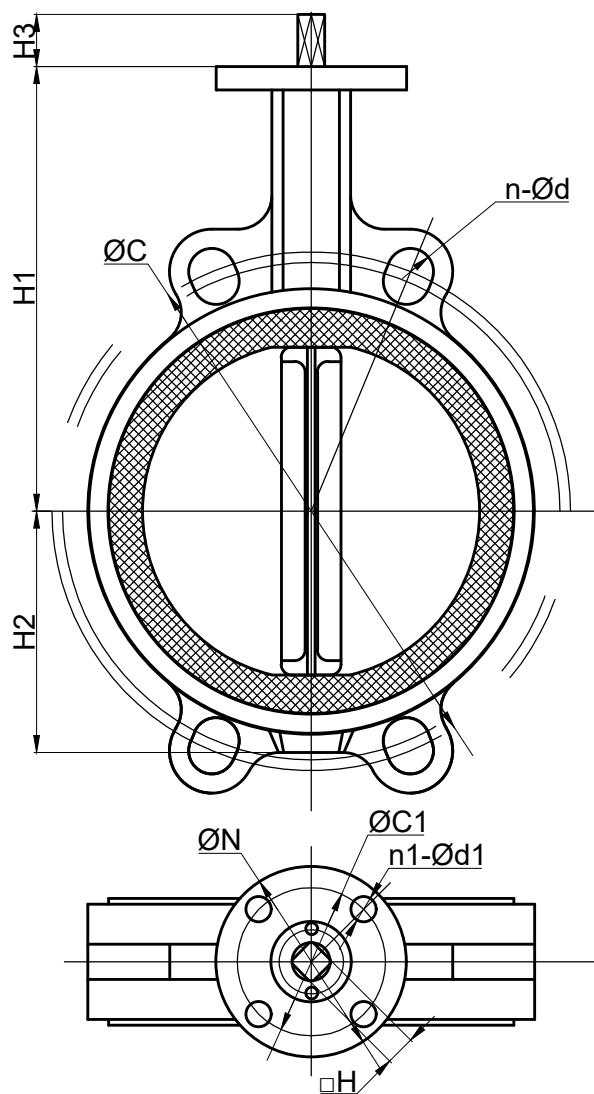

Nominal pressure		PN16
Test	Strength test	2.4Mpa
pressure	Sealing test	1.76Mpa
Maximum working temperture		-10°C to +90°C
Suitable Media		W.O.G etc

- 1.Design and manufacture according to ISO5752.
- 2.Face to face according to DIN3202-K1.
- 3.Flange drilling according to DIN2501 PN10/16.
- 4.Top flange drilling according to ISO 5211.
- 5.Pressure test according to API598.

6	Seal Ring	EPDM		
5	Bushing	PTFE		
4	Seat	EPDM		
3	Stem	SS420		
2	Disc	SS316		
1	Body	GGG40		
Item	Part name	Material	Q'ty	Remark

DN	L	DIN2501 PN10		DIN2501 PN16		H1	H2	H3	Flange No	ΦN	ΦC1	n1-Φd1	H
		ΦC	n-Φd	ΦC	n-Φd								
40	33	110	4-18	110	4-18	143	55	29	F05	65	50	4-Φ8	11
50	43	125	4-18	125	4-18	143	55	29	F05	65	50	4-Φ8	11
65	46	145	4-18	145	4-18	155	64	29	F05	65	50	4-Φ8	11
80	46	160	8-18	160	8-18	162	72	29	F05	65	50	4-Φ8	11
100	52	180	8-18	180	8-18	181	90	29	F07	90	70	4-Φ10	14
125	56	210	8-18	210	8-18	197	101	29	F07	90	70	4-Φ10	14
150	56	240	8-22	240	8-22	210	114	29	F07	90	70	4-Φ10	17
200	60	295	8-22	295	12-22	240	145	35	F10	125	102	4-Φ12	17

DRN	wang	WEIGHT		MATERIAL	
CHK		SCALE		Butterfly Valve	
APP		DATE	03/05/2025		
				B23W-HJ	
				REV	250305A