
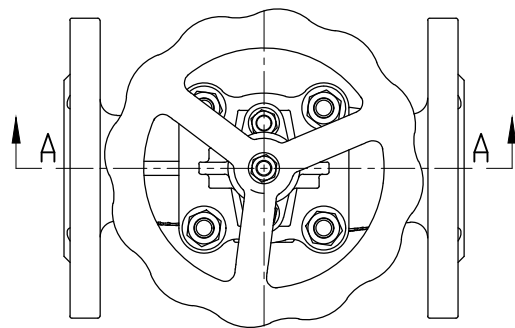
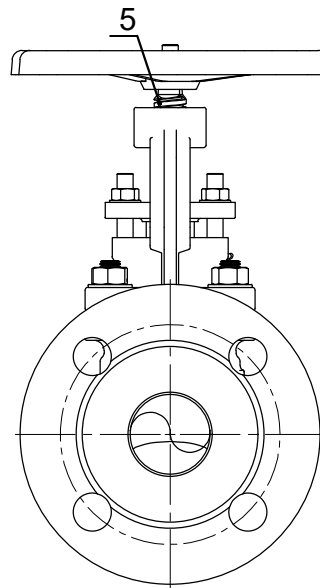


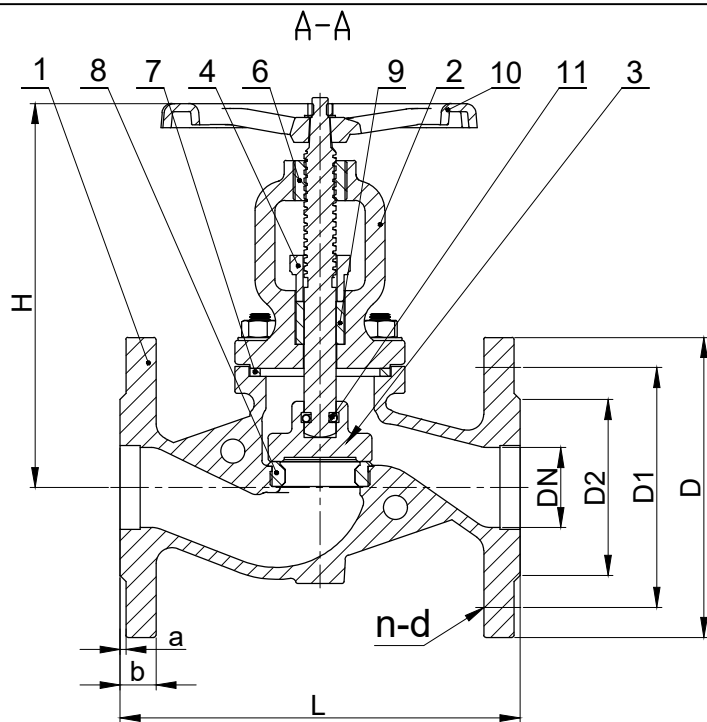

PRESSURE TEST TO ISO5208			
DN	Pressure Rating (PN)	Hydro-Test Pressure(Mpa)	
		Body	Seat
15-100	16	2.4	1.76

- 1.Design according to: DIN3356
- 2.Face to face according to:DIN3202 F1
- 3.Flange drilling according to :EN1092-2 PN16
- 4.Testing according to:ISO5208

Size	BS EN558	EN1092-2 PN16					b	H
	L	D	D1	D2	a	n-d		
DN15	130	95	65	46	2	4-14	14	180
DN20	150	105	75	56	2	4-14	16	176
DN25	160	115	85	65	3	4-14	16	195
DN32	180	140	100	76	3	4-19	18	184
DN40	200	150	110	84	3	4-19	19	192
DN50	230	165	125	99	3	4-19	19	251
DN65	290	185	145	118	3	4-19	19	264.5
DN80	310	200	160	132	3	8-19	19	304.5
DN100	350	220	180	156	3	8-19	19	350

11	Ball	Stainless steel		
10	Handwheel	Ductile iron		
9	Packing	Graphite		
8	Seat Ring	Brass		
7	Bonnet Gasket	Graphite+Steel		
6	Stem Nut	Brass		
5	Stem	SS420		
4	Gland Flange	Ductile iron		
3	Disc	Ductile iron		
2	Bonnet	Ductile iron		
1	Body	Ductile iron		
NO.	Part Name	Material	Q' ty	Remark
DRN	wang	WEIGHT		MATERIAL
CHK		SCALE		
APP		DATE	07/19/2024	
hiwa		Globe Valve		
		CJ0001		
		REV	20240719a	