
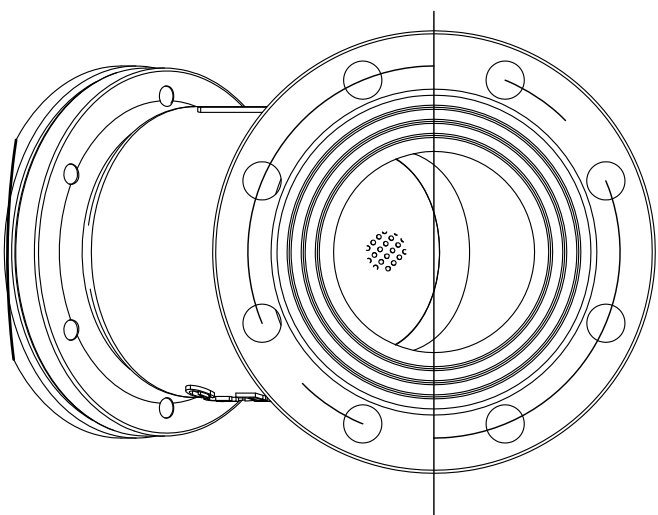


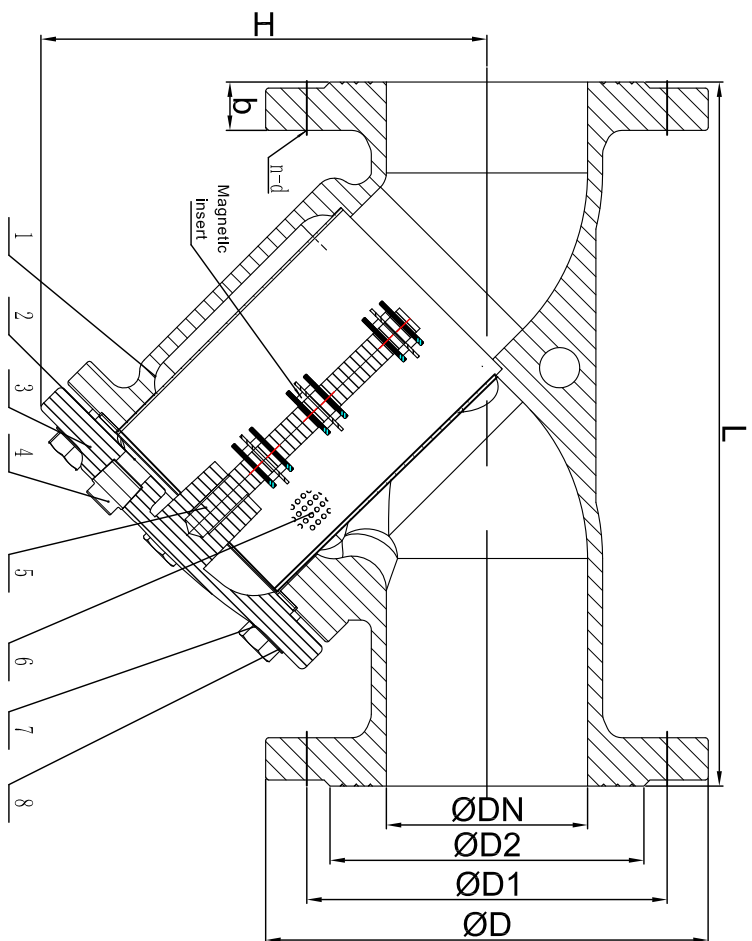

- 1.Face to face according to DIN 3202-F1.
- 2.Flange drilling according to EN1092-2 PN16.

DN	L	D	D1	D2	b	n-d	H
DN350	980	520	470	429	26.5	16-28	606
DN400	1100	580	525	480	28	16-31	690
DN500	1250	715	650	609	32	20-34	866
DN600	1450	840	770	720	36	20-37	1030

8	Washer	Galvanized steel	-	-
7	Bolt	Galvanized steel	-	-
6	Screen	Stainless steel	ASTM A276	304
5	Magnetic insert	-	-	-
4	Plug	Galvanized steel	-	-
3	Bonnet	Ductile iron	ASTM A536	70-50-05
2	Gasket	Rubber	EN681.1	EPDM
1	Body	Ductile iron	ASTM A536	70-50-05
No	Name	Material	Standard	Grade

DN	WANG	WEIGHT	MATERIAL
CHK		SCALE	Y-Strainer
APP		DATE	S101FM
		06/28/2019	
REV		20190628	

Hiwa