
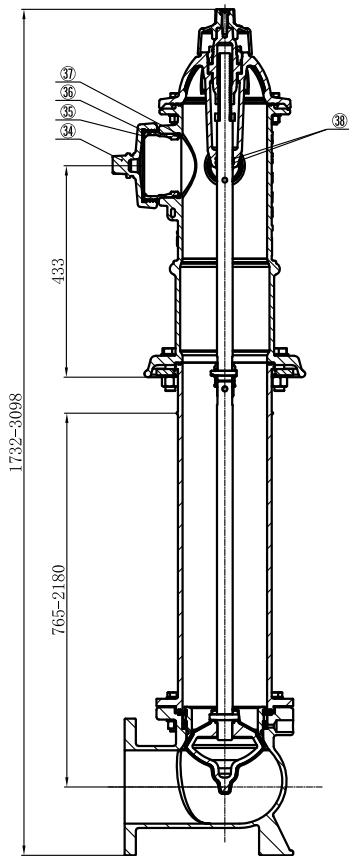
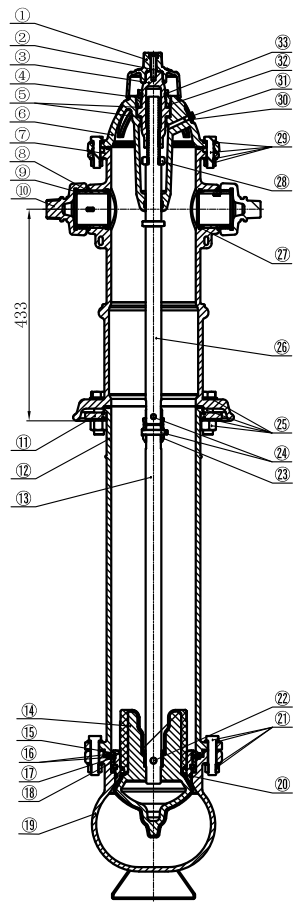


技术参数	
公称压力	300PSI
连接标准	ASME B16.5 CLASS 125/150、 EN1092-2 PN10/16、 AWWA C153机械法兰连接
设计标准	AWWA C502
埋地深度	30" (762)~86" (2180)

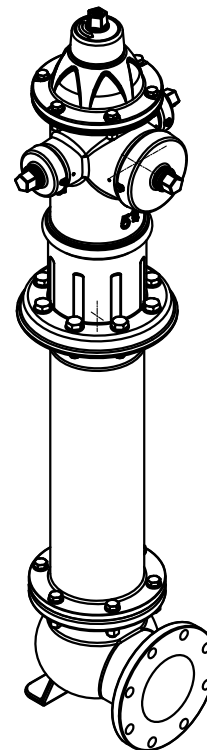

38	OXQ 31.5X3.55	2	EPDM
37	OXQ 125X5.3	1	EPDM
36	4.5"喷嘴	1	C62300
35	4.5"喷嘴密封垫	1	EPDM
34	4.5"喷嘴帽	1	65-45-12
33	OXQ 47.5X3.55	1	EPDM
32	OXQ 65X3.55	1	EPDM
31	油封	1	S304
30	OXQ 8X1.8	1	EPDM
29	M14螺栓组	6	S304
28	阀杆螺母	1	S304
27	OXQ 73X5.3	2	EPDM
26	上阀杆	1	S304
25	M20螺栓组	8	S304
24	开口销	2	S304
23	联轴器	1	S304
22	φ10 圆柱销	2	S304
21	M16螺栓组	6	S304
20	OXQ 147.5X5.3	1	EPDM
19	肘	1	65-45-12
18	排水环	1	C62300
17	OXQ 155X5.3	1	EPDM
16	OXQ 180X5.3	4	EPDM
15	阀座	1	C62300
14	阀瓣	1	65-45-12+EPDM
13	下阀杆	1	S304
12	直筒	1	65-45-12
11	易断法兰	2	65-45-12
10	2.5"喷嘴帽	2	65-45-12
9	2.5"喷嘴密封垫	2	EPDM
8	2.5"喷嘴	2	C62300
7	栓体	1	65-45-12
6	阀盖	1	65-45-12
5	减摩垫片	2	尼龙
4	锁紧螺母	1	C62300
3	操作螺母	1	C62300
2	M10内六角螺钉	1	S304
1	防尘帽	1	65-45-12
序号	名称	数量	材质

DRN		WEIGHT		MATERIAL	
CHK		SCALE		DN150 干式消防栓	
APP		DATE	09/14/2024		
hiwa					
				REV	20240924a